



Freedom Series Break-In Oil (SAE 30)

For High-Performance and Racing Engines

Freedom Series Break-In Oil is the preferred break-in oil of Fleece Performance Engineering and Freedom Racing Engines. It is designed to deliver maximum compression, horsepower and torque by providing quick and efficient piston ring seating in new and rebuilt high-performance and racing engines. It is formulated with zinc and phosphorus anti-wear additives to protect cam lobes, lifters and rockers during the critical break-in period when wear rates are highest. Its increased film strength also protects rods and main bearings from damage.

Fleece Performance Engineering and Freedom Racing Engines have been using this AMSOIL formulation for years. High horsepower and torque from their builds have tested the formula over and over. Freedom Series Break-In Oil is for engine builders who want to push limits without sacrificing proper break-in.



- **Quickly** seats piston rings
- **Protects** against wear
- **Maximizes** compression and power
- **Contains** no friction modifiers

Quickly Seats Rings


The primary goal during engine break-in is to seat the rings against the cylinder wall. Properly seated rings increase compression, resulting in maximum horsepower; they reduce oil consumption and prevent hot combustion gases from entering the crankcase. To achieve this, the oil must allow the correct level of “controlled wear” to occur between the cylinder wall/ring interface while maintaining wear protection on other critical engine parts. Insufficient break-in leaves behind peaks on the cylinder wall that prevent the rings from seating. The deeper valleys, meanwhile, allow excess oil to collect and burn during combustion, increasing oil consumption. Too much wear results in cylinder glazing due to peaks “rolling over” into the valleys and preventing oil from collecting and adequately lubricating the cylinder wall.

Freedom Series Break-In Oil’s friction-modifier-free formula allows the sharp peaks on newly honed cylinder walls (fig. 1) to partially flatten. The result produces more surface area for rings to seat against, allowing the formation of a dynamic seal that increases compression, horsepower and torque (fig. 2).

Fig. 1: New Cylinder



Fig. 2: Broken-In Cylinder

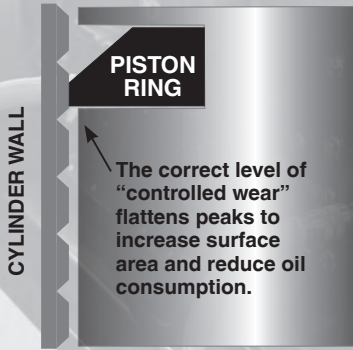

TYPICAL TECHNICAL PROPERTIES
Freedom Series Break-In Oil (FDBRK)

Table with 2 columns: Property and Value. Rows include Kinematic Viscosity @ 100°C, Kinematic Viscosity @ 40°C, Viscosity Index, Flash Point, Fire Point, Pour Point, Four-Ball Wear, and High-Temperature/High-Shear Viscosity.

Protects Critical Parts from Wear

New flat-tappet camshafts and lifters are not seasoned or broken in and must be heat-cycled to achieve proper hardness. During the break-in period, these components are susceptible to accelerated wear because they are splash-lubricated, unlike other areas of the engine that are pressure lubricated.

Increased Film Strength

High-performance and racing engines often use aftermarket parts designed to increase torque and horsepower. The added stress can rupture the oil film responsible for preventing harmful metal-to-metal contact on rod and main bearings.

APPLICATIONS

Freedom Series Break-In Oil is designed to effectively break in Freedom Racing Engines and other high-performance and racing engines, helping maximize compression, horsepower and torque.

RECOMMENDATIONS

Scan the QR code to the right to learn about Freedom Racing Engines' recommended break-in procedure. For other engines, follow the engine-builder or manufacturer break-in recommendations if available. For all other applications, the break-in period should not exceed 1,000 miles (1,600 km).

TECHNICAL SERVICES

For immediate answers to your technical questions call (715) 399-8324 (TECH) between 8 a.m. and 5 p.m. Central time or email tech@AMSOIL.com.

PRODUCT WARRANTY

Using AMSOIL synthetic lubricants or practicing extended drain intervals does not void your new vehicle or equipment manufacturer's warranty. All AMSOIL lubricants and filters are covered by the AMSOIL Limited Warranty.

HEALTH & SAFETY

This product is not expected to cause health concerns when used for the intended application and according to the recommendations in the Safety Data Sheet (SDS). An SDS is available online at AMSOIL.com or upon request at (715) 392-7101. Keep Out of Reach of Children. Recycle used oil and bottle.



Learn about Freedom Racing Engines break-in procedure.



Learn more about Fleece Performance fluid products.

All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Freedom Series products are available exclusively through the Authorized Fleece Performance and AMSOIL Dealer networks.

